


WarmMark Data Sheet

Specifications


Key Specifications

| | |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Indication Type | Visual, irreversible white to red color change in activation window |
| Activation Method | Manual: Pull-tab |
| Activation Temperature Levels | Sensitivities available between -18°C and 37°C. See product selection table for details |
| Temperature Accuracy | ±1°C / ±2°F |
| Run Out Time | See product selection for details |
| Product Life | 2 years from date of sale |
| Mounting Method | Pressure-sensitive adhesive (see Appendix B) |
| Storage Conditions | Store below the response temperature and below 55% relative humidity for optimal shelf life. |
| Dimensions | Mini: 0.75 X 1.08 X 0.06in / 19 X 27.4 X 1.5mm Short-Run: 1.81 x 0.75 x 0.06in / 46 x 19 x 1.5mm Long-Run & Duo: 3.88 x 0.75. x 0.06in / 98.1 x 19 x 1.5mm |

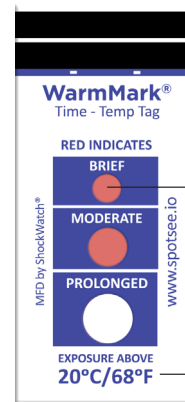

Color indicates exposure to warmer-than-acceptable conditions

Response temperature

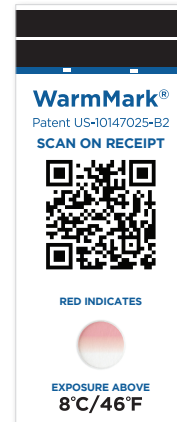

WarmMark


| Part Number | Temperature | Run-Out Time* | | |
|-------------|-------------|----------------|-------------------|--------------------|
| | | Window 1 Brief | Window 2 Moderate | Window 3 Prolonged |
| WM -18/0 | -18°C/0°F | 1 hour | 3 hours | 12 hours |
| WM 0/32 | 0°C/32°F | 2 hours | 12 hours | 48 hours |
| WM 5/41 | 5°C/41°F | 30 minutes | 2 hours | 8 hours |
| WM 8/46 | 8°C/46°F | 2 hours | 12 hours | 48 hours |
| WM 10/50 | 10°C/50°F | 2 hours | 12 hours | 48 hours |
| WM 20/68 | 20°C/68°F | 2 hours | 12 hours | 48 hours |
| WM 25/77 | 25°C/77°F | 30 minutes | 2 hours | 8 hours |
| WM 30/86 | 30°C/86°F | 30 minutes | 2 hours | 8 hours |
| WM 37/99 | 37°C/99°F | 30 minutes | 2 hours | 8 hours |

WarmMark QR

| Part Number | Temperature | Run-Out Time |
|---------------|-------------|--------------|
| WM -18/0 - SQ | -18°C / 0°F | 12 hours |
| WM 0/32 - SQ | 0°C / 32°F | 48 hours |
| WM 5/41 - SQ | 5°C / 41°F | 8 hours |
| WM 8/46 - 8Q | 8°C / 46°F | 8 hours |
| WM 8/46 - 12Q | 8°C / 46°F | 12 hours |
| WM 8/46 - SQ | 8°C / 46°F | 48 hours |
| WM 10/50 - SQ | 10°C / 50°F | 48 hours |
| WM 25/77 - SQ | 25°C / 77°F | 8 hours |
| WM 26/79 - SQ | 26°C / 79°F | 48 hours |
| WM 30/86 - SQ | 30°C / 86°F | 8 hours |
| WM 37/99 - SQ | 37°C / 99°F | 8 hours |

WarmMark Mini


| Part Number | Temperature | Run-Out Time |
|---------------|-------------|--------------|
| WM 8/46 - SB | 8°C / 46°F | 2 hours |
| WM 25/77 - SB | 25°C / 77°F | 2 hours |



WarmMark Data Sheet

WarmMark Long-Run


| WM Long-Run Part Number | Threshold Temp | Run-Out Time* | | | | |
|-------------------------|----------------|---------------|----------|----------|-----------|-----------|
| | | Line 1 | Line 2 | Line 3 | Line 4 | Line 5 |
| WL 10/50 | 10°C/50°F | 12 hours | 30 hours | 60 hours | 110 hours | 168 hours |
| WL 31/88 | 31°C/88°F | 12 hours | 30 hours | 60 hours | 110 hours | 168 hours |

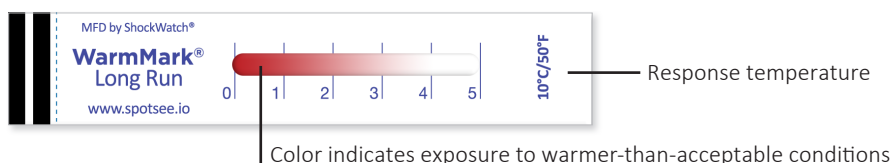

WarmMark Duo

| WarmMark Duo Part Number | Threshold Temp | Run-Out Time* | | | |
|--------------------------|----------------|---------------|----------|----------|----------------|
| | | Window 1 | Window 2 | Window 3 | Window 4 |
| WD 10-34 | 10°C/50°F | 3 days | 8 days | 14 days | - |
| WD 10-34 | 34°C/93°F | - | - | - | Within 30 mins |

*Run out times are based on a constant temperature 2°C above the indicator temperature threshold. Exposure to higher temperatures will result in faster run out. Brief (Window 1) and Moderate (Window 2) time figures are for guidance, while the Prolonged (Window 3 or only window) is controlled to the time specification.



Pressure-Sensitive Adhesive Data

Product Description

- High performance, acrylic pressure-sensitive adhesive (2 mil thick film) that provides excellent adhesion to most smooth surfaces
- Provides aggressive tack and high shear strength
- Excellent UV light stability and elevated temperature resistance

| Physical Properties | Typical Values* |
|---------------------------------------------------------------|--------------------|
| Quick Tack Stainless Steel | 4.0 lbs./sq.in. |
| Peel Adhesion Stainless Steel - 30 minute residence | 4.1 lbs./in. |
| Shear Stainless Steel - 1000 g/sq. in.@ 72°F | 300+ hours to fail |
| Thickness Adhesive only | .002 inches |

Temperature Range Guidelines

Application: Above 10°C/50°F for best performance

End Use: -40°C to 121°C/-40°F to 250°F

Chemical Resistance

Resistant to water, detergent, alcohol, aliphatic and some aromatic hydrocarbons. Not recommended for use in contact with active solvents such as ketones, esters, and some chlorinated hydrocarbons.

*Values given are typical and are not necessarily for use in specifications. Product reinforced with 2 mil PET during adhesion tests.

WarmMark Data Sheet

How to Mount


Temperature indicators are best suited for monitoring product or the controlled environment of the product.

WarmMark ascending temperature indicators are best used when mounted directly to the product being monitored or when placed inside the product shipper. Indicators should not be placed directly on gel packs, phase change materials, etc. as this will result in measuring the temperature of the packaging material components instead of the temperature of the product or environment.


In rare cases, temperature indicators are mounted on external packaging to monitor ambient temperature conditions.

Drawings


WarmMark

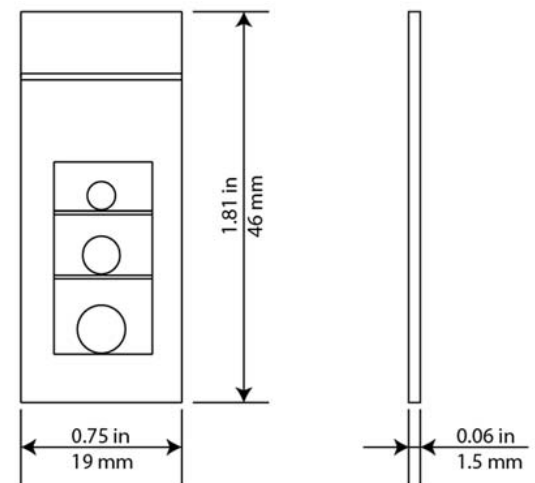

WarmMark Long Run

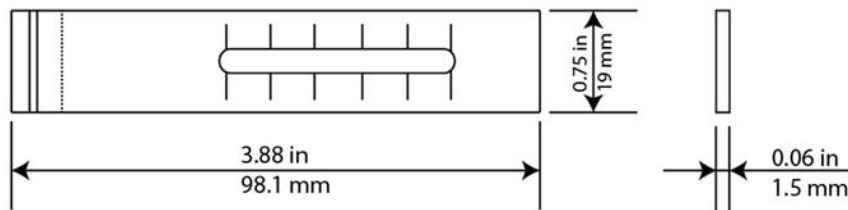

WarmMark Mini



WarmMark Duo

